



CUSTOMER INFORMATION

Nitrotouch® Foam

Description:

With a tough nitrile foam dip for fantastic grip and durability, our Nitrotouch Foam Gloves are designed with your safety in mind. So whatever your day may throw your way, these gloves will offer optimum protection.

- Conforms to EN 388 levels 4-1-2-1
- Nitrile foam dip for enhanced grip
- High dexterity
- Enhanced abrasion resistance
- Washable
- Knitted wrist band

Fabric:

- Nitrile foam palm coat

Applications:

Tasks with maintenance, warehousing, construction, fabrication/assembly, material handling, general plant use

Colourways:



Product Codes:

60061-5	S - 2XL	Nitrotouch Foam White
60071-5	S - 2XL	Nitrotouch Foam Black
60081-5	S - 2XL	Nitrotouch Foam Grey

Standards:




EN 388



Abrasion: 4
Blade Cut: 1
Tear: 2
Puncture: 1

EC Council Directive 89/686/EEC
BS EN 420:2003+A1:2009 - Sizing & Dexterity: PASS
BS EN 388:2003 - Protection Against Mechanical Hazards



Size Chart:


Measurements in mm	7 (S)	8 (M)	9 (L)	10 (XL)	11 (2XL)
Hand Length (A)	171	182	192	204	215
Hand Circumference (B)	178	203	229	254	279

Issue No.: 2

Issue Date: 20/02/2014

Packaging: 1 pair per bag - 12 bags per master poly - 10 master polys per case

Outer Carton Artwork:

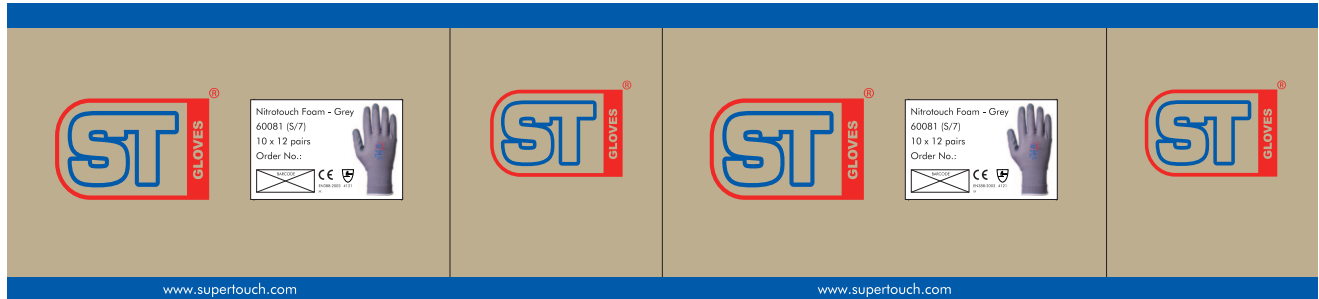

Inner Artwork:

● SMALL
● MEDIUM
● LARGE
● X LARGE
● 2X LARGE

ST GLOVES[®]
NITROTOUCH FOAM - G
Nitrile Palm Coated Gloves

SILICO FREE

SEE WINDOW FOR GLOVE COLOUR

S/7 60081	M/8 60082	L/9 60083	XL/10 60084	2XL/11 60085
--------------	--------------	--------------	----------------	-----------------

Certification Body:
SATRA Technology Centre,
Kettering,
NN16 8SD,
UK

CE
CAT II

These products are classified as Personal Protective Equipment by the European PPE Directive 89/686/EEC. CAREFULLY READ INSTRUCTIONS BEFORE USE

This product is designed to provide protection against Mechanical Risks. No item of PPE can provide full protection - care must always be taken whilst carrying out the activity.

EN 420:2003+A1:2009 Protective Gloves – General Requirements

Fitting & Sizing: Only wear products of a suitable size. Products which are either too loose or too tight will restrict movement and will not provide the optimum level of protection.

Storage & Transport: Store the product in a well ventilated area away from extremes of temperature & strong odours.

Inspection Before & After Use: Discard and replace damaged products before use. If in doubt consult manufacturer.

Cleaning: It is recommended that this product should not be washed or dry-cleaned.

EN 388:2003 Protective Gloves Against Mechanical Risks

Test	Level Achieved	Maximum Level
Abrasion Resistance	4	(4)
Blade Cut Resistance	1	(2)
Tear Resistance	2	(4)
Fracture Resistance	1	(4)

Note: Referential levels apply to the EN388:2003 palm area of the hand.

Warning: These gloves will not prevent cutting injuries, or injuries associated with vibration. They are not to be worn when there is a risk of entrapment by moving parts of machinery.

4121

This product is supplied under control
Certified to meet the requirement of ISO 9001
www.supertouch.com XX
Unit A1 Hubert Road, Brentwood, Essex, CM14 4JE

Feature Symbols:



Product packed in retail bags

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.