



CUSTOMER INFORMATION

Rock Kevlar Gloves

Description:

With a distinctive blue latex palm for extra grip, our Rock Kevlar Gloves are the ultimate choice for a range of handling and construction tasks. From glass handling to agricultural work, these gloves work hard to protect you as you work.

- Conforms to EN 388 levels 4-5-4-4
- Textured grip
- Elasticated knit wrist
- Enhanced cut resistance
- Rugged heavy duty glove

Fabric:

- 10 gauge Kevlar fibre
- Blue latex palm coat

Applications:

Tasks with general handling, construction, glass/metal handling, transportation/shipping, agricultural

Colourways:



Blue/Yellow

Product Codes:

71011-5 One Size Rock Kevlar Blue/Yellow

Standards:




EN 388



Abrasion: 4
Blade Cut: 5
Tear: 4
Puncture: 4

EC Council Directive 89/686/EEC
BS EN 420:2003+A1:2009 - Sizing & Dexterity: PASS
BS EN 388:2003 - Protection Against Mechanical Hazards



Size Chart:


Measurements in mm	7 (S)	8 (M)	9 (L)	10 (XL)	11 (2XL)
Hand Length (A)	171	182	192	204	215
Hand Circumference (B)	178	203	229	254	279

Issue No.: 2

Issue Date: 18/02/2014

Packaging: 12 pairs per bag - 10 bags per case

Outer Carton Artwork:

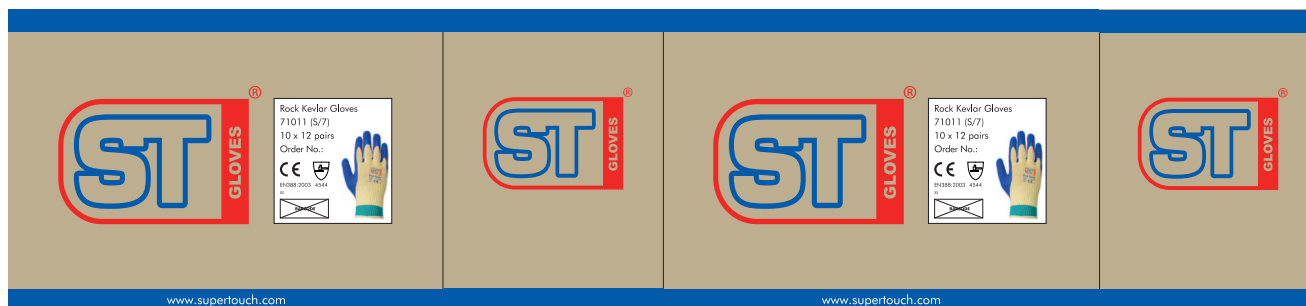

Inner Artwork:

SMALL
MEDIUM
LARGE
X LARGE
2X LARGE

BA00000000

ROCK
100% Kevlar With Latex Palm Coating

Certification Body: SATRA Technology Centre, Kettering, NN16 8DQ, UK

CE CAT II

These products are classified as Personal Protective Equipment by the European PPE Directive 89/686/EEC.

CAREFULLY READ INSTRUCTIONS BEFORE USE

The product is designed to provide protection against mechanical risks. No level of PPE can provide full protection; users must always be taken whilst carrying out the activity.

EN 420:2003+A1:2009 Protective Gloves – General Requirements

Fitting & Sizing: Only wear products of a suitable size. Products which are either too loose or too tight will result in a poor fit and will not provide the necessary level of protection.

Storage & Transport: Store the product in a well-ventilated area away from extremes of temperature & dampness.

Inspection Before & After Use: Check and inspect storage products before use. If in doubt consult manufacturer.

Cleaning: It is recommended that this product should not be washed or disinfected.

EN 388:2003 Protective Gloves Against Mechanical Risks

Test	Level Achieved	Minimum Level
Abrasion Resistance	4	2
Impact Resistance	5	2
Tear Resistance	4	2
Cut Resistance	5	2

Note: Performance levels relate to the palm area of the hand.

Warning: These gloves should not prevent crushing injuries, or injuries associated with vibration. They are not to be worn when there is a risk of entrapment by moving parts of machinery.

4544

Gloves containing natural rubber latex might cause allergies which are known to be a possible cause of distress in sensitive persons. If any allergic reaction should occur, then medical advice should be obtained immediately.

This product is supplied under contract.
Certified to meet the requirements of ISO 9001
www.supertouch.com XX
Unit A1 Hubert Road, Brentwood, Essex, CM14 4JE

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.