



EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/2810/162/03/20/0809

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer : Allied International Trading Ltd t/a Supertouch
Unit 3 Rabone Park Rabone Lane Smethwick West Midlands B66 2NN
UK

Description

PPE Type : *protective glove against mechanical risks, thermal risks*

Product reference : PG510

Article code : /

Glove description : 13G UHMWPE/glass fibre/nylon/spandex liner with first full nitrile smooth plus second layer palm nitrile sandy coated

Available sizes : S/7 M/8 L/9 XL/10 XXL/11

Pictures :



Pawā®
by Supertouch
L/9 PG510

LOT



EN388:2016 EN407:2004 GAT II



4X44D



X1XXXX



Unit 3 Rabone Park Rabone Lane Smethwick
West Midlands B66 2NN , UK

Supertouch B66 2NN-UK

Reference standard :

Levels of performance / class of protection

EN 420:2003+A1:2009

-

EN 388:2016 + A1:2018

4 X 4 4 D

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

EN 407:2004

X 1 X X X X

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the Instruction for Use index 01 dated from March 2020

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by
Maxence DREVET
Project Certification Manager

Date of first issue : 12 March 2020
End of validity date : 12 March 2025



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.



Accreditation n° 5-0594
Scope available on:
www.cofrac.fr

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

Allied International Trading Ltd t/a Supertouch

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	:	PG510
Article code	:	/
Technical file index	:	01
Last update	:	March 2020

IDENTIFICATION

Reference of the product :	:	PG510
Article code :	:	/
Basic Model		
Technical file index :	:	01
Last update :	:	March 2020

Manufacturer :

Allied International Trading Ltd t/a Supertouch
Unit 3 Rabone Park Rabone Lane Smethwick West Midlands B66 2NN
UK
tel : + 0121 565 5066 Ext: 3222
fax : /

Factory :

Jiangsu Hanvo Safety Product Co., Ltd
HUANGSHAN ROAD,RUDONG NEW DEVELOPMENT ZONE,RUDONG
COUNTY,JIANGSU
CHINA
tel: 0086-513-81907309
fax: 0086-513-84536318

GLOVE DESCRIPTION

General glove description :

13G UHMWPE/glass fibre/nylon/spandex liner with first full nitrile smooth plus second layer palm nitrile sandy coated
 type of coating finish : sandy

Visual description (picture back and palm sides) :



Field of use

glass handling operations, general maintenance, wood working, sheet metal handling, sharp small parts handling, transportation & warehousing, construction for mechanical & contact heat risk

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)			
		Applicable	Covered by
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.4	If it is known that the design performance of new PPE may be significantly affected by ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and unambiguously marked on each item of PPE placed on the market and on its packaging.	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§2.14	Multi-risk PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.6	Protection against heat and/or fire	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking

Available sizes :

Minimum length of glove (mm)	Sizes
230	S/7
240	M/8
250	L/9
260	XL/10
270	XXL/11

Glove constitution :

	Reference	Color	Material	Surfacic mass	Gauges	Thickness
Palm	first full coating	Blue	nitrile	200g/m ²		0.4mm
	second coating	Black	nitrile	230g/m ²		0.5mm
		Black/white	UHMWPE/glass fibre/nylon/spandex	380g/m ²	13G	
Back	first full coating	Blue	nitrile	200g/m ²		0.4mm
		Black/white	UHMWPE/glass fibre/nylon/spandex	380g/m ²	13G	
Cuff		Black/white	UHMWPE/glass fibre/nylon/spandex/elastic	420g/m ²	13G	
Binding		green / yellow / white / red / navy blue	polyester			

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.
This glove is designed against mechanical risks, thermal risks.
It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420 : 2003 + A1 : 2009

Dexterity : 5

Size : conform

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2016 + A1 : 2018

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	X
Tear strength resistance	4
Puncture resistance	4
Cut Resistance method (EN ISO 13997)	D
Impact Protection	-

The levels of performance have been measured on the palm

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

Thermal hazard EN 407 : 2004

Protection offered	Performance levels
Burning behaviour	X
Contact heat	1
Convective heat	X
Radiant heat	X
Small splashes of molten metal	X
Large quantities of molten metal	X


TEST REPORTS

Laboratory	CTC	Other
EN 420 + innocuousness	S170302818_1 S160504879_2 S150504136_2 S151109537_1 S160301680_1 S181115170_1(dmfu)	
EN 388	S170302818_1 S170302511_2	
EN 407	S190506765_1	

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : PG510

Article Code : /

Size indicator


Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or Serial number :

Marking example :

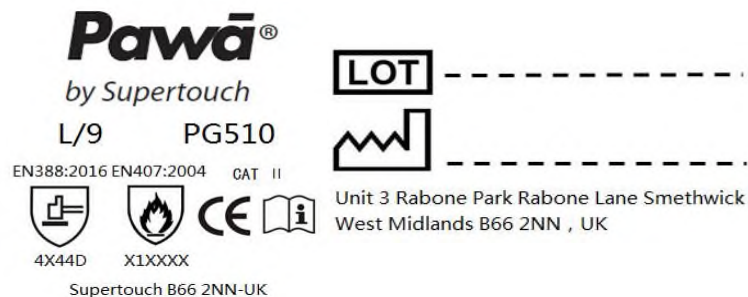

Method of marking on the glove :

printing on the back and the label sewing in the overlock

Packaging :

1 pairs in the poly bag ,12 pairs in the poly bag,120 pairs in a carton

PPE subject to ageing :

Peremption period : 5 years when stored in appropriate conditions (humidity, temperature, clean , ventilated, light). Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

Declaration of conformity :

Available with product.

MEANS OF CONTROL

Firstly, IQC will take sample to monitor (ISO 2859, G1) the knitting gloves performance. They check the gloves on hand former, and monitor the glove color, total length, weight, visual defect Ext. If find abnormal will follow the non-conforming procedure to handle it.

Then, IPQC will check the product after dipping, they will check the total length, palm width, weight, and monitor the visual defects and performance, example: taste, dipping position Ext.

The next is packing process, QA will monitor the logo, bag, carton, label Ext. If ok, the glove will be send to warehouse.

In warehouse, FQC will check the final product.

This is a strict monitor procedure. We pick out the defects around 2%-4% in this process. We can ensure the quality according it.

Then, we will ship the gloves to our customer site.

For EN388 test, we have been certified by SATRA, we have test machine in our laboratory. When we beginning a new order, we will test the gloves firstly. We also have the testing regularly during the production process. The testing includes abrasion(test every one year), cut, tear, puncture and TDM CUT .

For EN420 test, we asked our vendor to according to the request, and they cannot use any materials which contain Hazardous Substances. For each style, we send the final gloves to third party to monitor it regularly. EN407 test: at present, When we beginning a new order, then we will have test thickness by ourself, and send to CTC to test EN 407 per three year.

INSTRUCTION FOR USE

Allied International Trading Ltd t/a Supertouch
Unit 3 Rabone Park Rabone Lane Smethwick West Midlands B66 2NN
UK

Glove reference : PG510
Article code: /
User notice index : 01
Last update : March 2020
Available sizes : S/7 M/8 L/9 XL/10 XXL/11

Pawa®

by Supertouch

L/9 PG510

EN388:2016 EN407:2004 GAT II



4X44D X1XXXX

Supertouch B66 2NN-UK

LOT



Unit 3 Rabone Park Rabone Lane Smethwick
West Midlands B66 2NN, UK

Glove description :

13G UHMWPE/glass fibre/nylon/spandex liner with first full nitrile smooth plus second layer palm nitrile sandy coated

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the PPE Regulation 2016/425 applicable from April 21th, 2018 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

Applicable standards :

The glove meets the requirements of the standard EN 420 : 2003 + A1 : 2009 « General requirements for work glove ». Dexterity : 5

Moreover, this glove has been designed for the following applications :

Application :

Mechanical hazard - EN 388 : 2016 +
A1:2018



4 X 4 4 D

Levels of performance

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	X	(on 5 maxi)
Tear resistance	4	(on 4 maxi)
Puncture resistance	4	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	D	(A to F)
Impact Protection		

Application :

Thermal risk - EN 407 2004



X1XXXX

Levels of performance

Burning behaviour	X	(on 4 maxi)
Contact heat	1	(on 4 maxi)
Convective heat	X	(on 4 maxi)
Radiant heat	X	(on 4 maxi)
Small splashes of molten metal	X	(on 4 maxi)
Large quantities of molten metal	X	(on 4 maxi)

Protection limit :

This glove provides a protection for limited time with contact of hot products.

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

The levels of performance mentioned are only valid for the palm of the glove.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire

Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

For gloves with different layers of material, the performance levels are warranted only for the whole glove.

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

PPE subject to ageing :

Peremption period : 5 years when stored in appropriate conditions (humidity, temperature, clean, ventilated, light). Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

Declaration of conformity :

Available with product.